

8300100095

VBH0560CTTPS

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

## ebm-papst Mulfingen GmbH & Co. KGaA & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

**Item** 8300100095

**Motor** E15031-85

Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60

Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	2080
Power consumption	W	4400
Current draw	A	6.7
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	74.6	58.2	09 Power consumption $P_{ed}$	kW	4.36
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	12210
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	926
04 Efficiency grade N		78.4	62	10 Speed (rpm) $n$	min <sup>-1</sup>	2080
05 Variable speed drive		Yes		11 Specific ratio <sup>*</sup>		1.01

Data obtained at optimum efficiency level.

<sup>\*</sup> Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-215087

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).  
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.  
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100095

VBH0560CTTPS

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

## Technical description

<b>Weight</b>	44.9 kg
<b>Size</b>	560 mm
<b>Motor size</b>	150
<b>Rotor surface</b>	Painted black
<b>Electronics housing material</b>	Die-cast aluminum
<b>Impeller material</b>	PP plastic
<b>Support plate material</b>	Sheet steel, galvanized
<b>Support bracket material</b>	Steel, painted black
<b>Inlet nozzle material</b>	ABS plastic
<b>Number of blades</b>	5
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP55
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	H1
<b>Ambient temperature note</b>	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	See legend on product drawing
<b>Condensation drainage holes</b>	On rotor side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Operation and alarm display with LED</li> <li>- External 15-50 VDC input (parameterization)</li> <li>- Alarm relay</li> <li>- Integrated PI controller</li> <li>- Configurable inputs/outputs (I/O)</li> <li>- MODBUS V6.3</li> <li>- Motor current limitation</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Voltage output 3.3-24 VDC, Pmax = 800 mW</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> <li>- Vibration sensor</li> </ul>
<b>Power Factor Correction (PFC)</b>	Passive (through low-capacitance DC link)
<b>EMC immunity to interference</b>	According to EN 61000-6-2 (industrial environment)
<b>EMC interference emission</b>	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	Terminal box
<b>Motor protection</b>	Electronic motor protection

8300100095  
VBH0560CTTPS

## EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

<b>Protection class assignment</b>	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
<b>Conformity with standards</b>	EN 61800-5-1; UKCA; CE
<b>Approval</b>	UL 1004-7 + 60730-1; EAC; CSA C22.2 No. 77 + CAN/CSA-E60730-1

8300100095


VBH0560CTTPS

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

## Product drawing

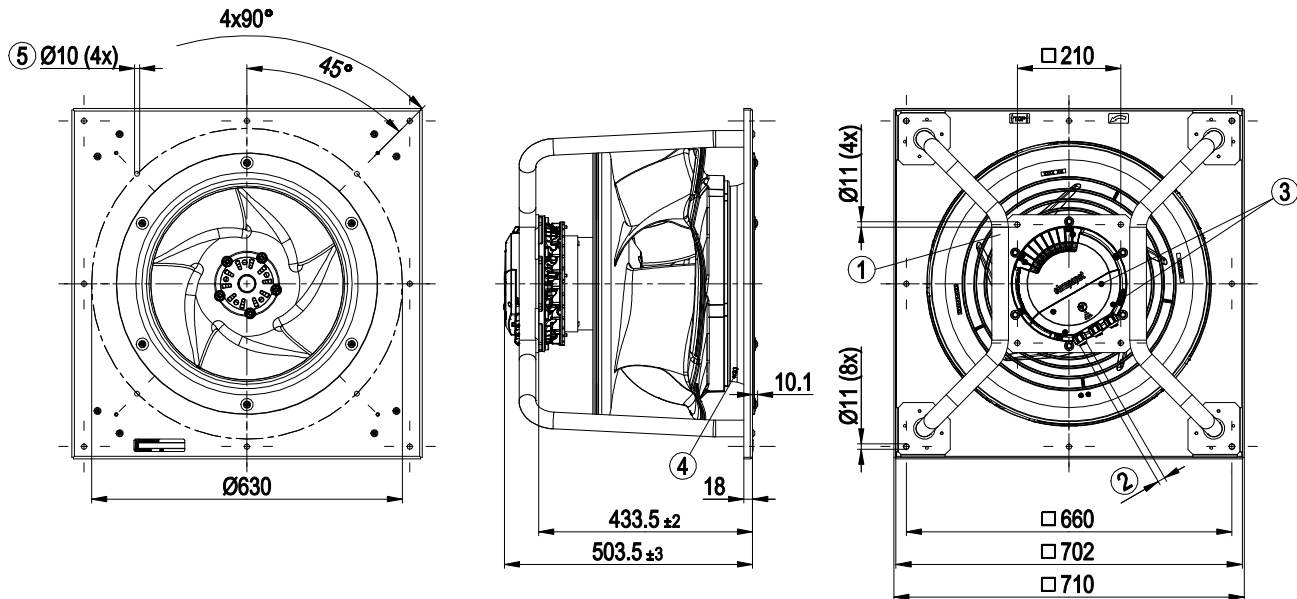


1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque $1.5 \pm 0.2$ Nm
4	Inlet ring with pressure tap (k-factor: 381)
5	Attachment holes for FlowGrid 50710-2-2957 (not included in scope of delivery)

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

## Connection diagram

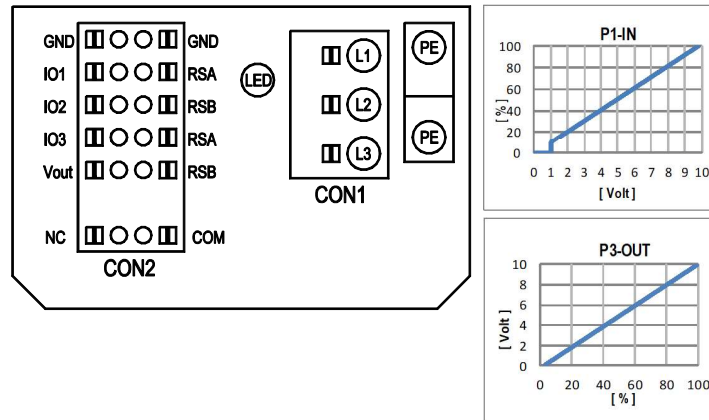

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

## Terminal/plug assignment

CON2	configurable IO mode	electrical specification	configurable IO functions: normal / inverse
IO1	○ Din1 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D158 [0]
	○ Ain1 0-10V/PWM: analog input	Ri = 100K, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$ , SELV	D158 [2]
	○ Tach out (open collector output)	Umax = 50VDC, Imax = 20mA, SELV	D158 [5]
	○ Diagnostics out (open collector output)	Umax = 50VDC, Imax = 20mA, SELV	D158 [6]
IO2	○ Din2 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D159 [0]
	○ Ain2 0-10V/PWM: analog input	Ri = 100K, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$ , SELV	D159 [2]
	○ Ain2 4-20mA: analog input	Ri = 125R, characteristic curve parameterizable, SELV	D159 [3]
IO3	○ Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D15A [0]
	○ Din3 (active low): digital input	active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC	D15A [1]
	○ PWMIn3: digital input, idle level high	PWM = 40Hz- 10kHz, characteristics parameterizable active: pin open or applied voltage 3,5-50VDC not active: applied voltage < 1,5VDC, SELV	D15A [7]
	○ PWMIn3: digital input, idle level low	40Hz- 10kHz, characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	D15A [8]
	○ Aout3 0-10V: analog output	function parameterizable, max. 5mA, max output frequency 300Hz, SELV	D15A [4]
	○ Tacho out (pulses): analog output	0-10V max. 5mA, max output frequency 300Hz, SELV	D15A [5]
	○ Diagnostics out (pulses)	0-10V max. 5mA, max output frequency 300Hz, SELV	D15A [6]
RSA	RS485 bus connection,	MODBUS RTU, specification V6.3, SELV	
RSB	voltage output	voltage parameterizable 3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV	D16E [-,]
Vout	alternatively: Input auxiliary power supply for parameterization via RS485/ MODBUS RTU without line voltage	15...50VDC	

terminal	signal	function
D101 [...]	source: set value	INPUT
D147 [...]	source: sensor value	INPUT
D104 [...]	switch: parameter set: #1 / #2	INPUT
D12E [...]	switch: control function: heating (pos.) / cooling (neg.)	INPUT
D148 [...]	switch: direction of rotation: cw / ccw	INPUT
D16C [...]	switch: set value source	INPUT
D16A [...]	switch: fan enable / disable	INPUT
(selected directly via IO mode)	signal: tach out	OUTPUT
(selected directly via IO mode)	signal: diagnostics out	OUTPUT
D130 [0]	signal: fan modulation level %	OUTPUT
D130 [1]	signal: actual speed	OUTPUT
D130 [2]	signal: system modulation level %	OUTPUT
D130 [5]	signal: remote control output 0-10V	OUTPUT
D00C [1]	pulse input for auto-addressing	OUTPUT
D130 [4]	pulse output for auto-addressing	OUTPUT


○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

## Curves: Air performance 50 Hz

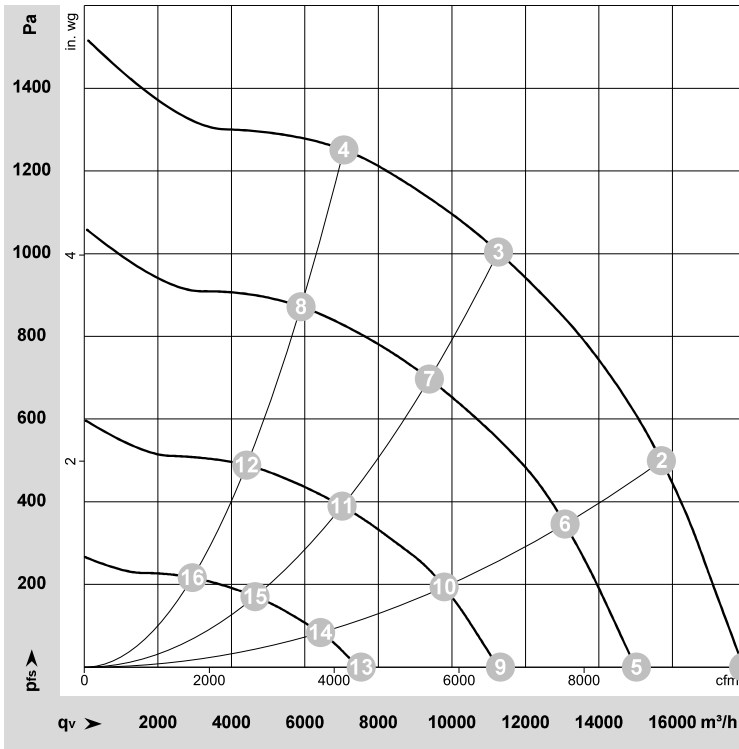

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-215087-1  
Date: 2021-07-26  
Nozzle: 8217101924

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	LwA	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	dB	m <sup>3</sup> /h	Pa	cfm	in. wg
1	3~	400	50	2080	2670	4.12	84	92	96	98	17935	0	10555	0.00
2	3~	400	50	2080	3864	5.89	78	86	90	92	15700	500	9240	2.01
3	3~	400	50	2080	4400	6.70	72	80	85	87	11265	1000	6630	4.01
4	3~	400	50	2080	4112	6.27	77	84	89	90	7060	1250	4155	5.02
5	3~	400	50	1735	1584	2.53	79	87	91	92	15020	0	8840	0.00
6	3~	400	50	1735	2248	3.50	74	81	85	87	13075	346	7695	1.39
7	3~	400	50	1735	2555	3.95	68	75	81	82	9385	697	5525	2.80
8	3~	400	50	1735	2400	3.72	71	78	83	84	5895	875	3470	3.51
9	3~	400	50	1300	734	1.34	72	80	84	85	11320	0	6660	0.00
10	3~	400	50	1300	1004	1.71	66	74	78	80	9790	194	5760	0.78
11	3~	400	50	1300	1124	1.87	60	68	74	75	7015	389	4130	1.56
12	3~	400	50	1300	1062	1.79	62	70	75	76	4415	492	2600	1.98
13	3~	400	50	865	263	0.67	62	70	74	75	7530	0	4430	0.00
14	3~	400	50	865	331	0.79	57	65	69	70	6425	84	3785	0.34
15	3~	400	50	865	366	0.84	51	59	63	65	4645	171	2735	0.69
16	3~	400	50	865	352	0.82	50	57	62	64	2940	218	1730	0.88

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase