

CBAS300-T2-G2P


Mind O≠0, I≠I≠1, S≠5, B≠8.

Operating range	0.4...1.5 m · 1½...5 ft
Operating voltage	10...35 V _{DC}
Current consumption	37 mA
Operating temperature	-20...+55 °C · -3...+132 °F
Cycle time	13.5 ms
IP code	IP 65
Housing material	aluminum, powder-coated
Pane material	PMMA
Quantity of beams	576
Operation indicator	LED green
Connection	cabl 2 m PVC
Weight	273 g · 9.6 oz
Tariff code	85365019
Complies with	CE, RoHS




25 months Warranty Our products are manufactured to stringent ISO 9001 European standards to ensure that our customers only receive the best quality.

Wiring diagram

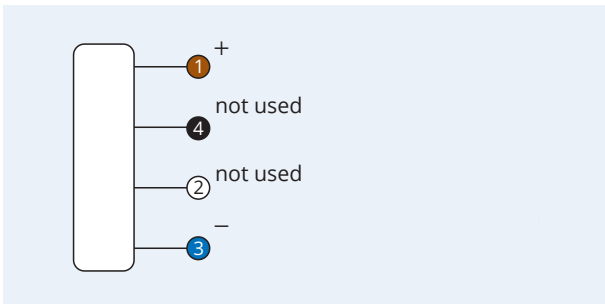

Pinout

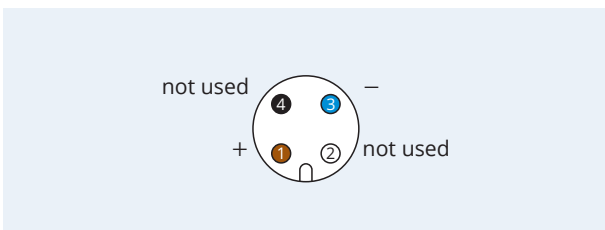

Caution! This device shall not be used if the safety of persons relies on its faultless function.

Crossed-Beam Area Sensor Transmitter

Active zone: 300 mm · Range: 2 m

