


**NB!** -Fornire condensatore 1µF con codulo M8 e relativo dado e rondella dentellata Ø8  
 -Fornire vite M4x14 T.E. e rondella premiventola

### SCHEMA DI COLLEGAMENTO

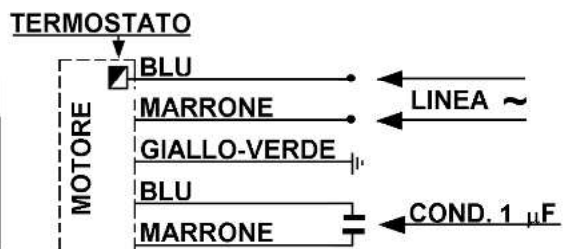

#### Targhetta Dati

ET.: B1 MOD.: 292.1

30.82.242.01

230 V~ 50/60 Hz 0,16/0,20 A

34/45 W 2850/3350 min<sup>-1</sup>

1 µF / >400 V~

THERM.PROT. CL. B

00X00 / 01

2	02/02/21	Inserito profondità MAX 5mm	R.C.				
ED.	DATA DATE	MODIFICHE MODIFICATIONS	DIS. DRWN	ED.	DATA DATE	MODIFICHE MODIFICATIONS	DIS. DRWN
DENOMINAZIONE / DESCRIPTION				TOLLERANZE GENERALI / GENERAL TOLERANCE			
Motore chiuso 2Poli 85x85 P.20 a condensatore 230V~ 50/60Hz				Cristian R.			
				SCALA / SCALE			
				DATA DATE 17/01/2007			
		MA-VIB S.p.A. Inzago (MI) Italy <a href="http://www.mavib.com">www.mavib.com</a>		SOSTITUIBILI DA / REPLACED BY SOSTITUZIONE / REPLACES DIS. CLIENTE / JUST DRW RIF. CATALOGO / REF. CATALOGUE		V06-C055	
				NOME FILE / FILE NAME		DESIGNO NR. / DRAWING NO.	
				30.82.242.01		EDIZIONE / EDITION 2	