



| Pace® Economy Grade | PLATO® Economy Grade | Pace® Premium Grade | PLATO® Premium Grade | D ₁ | D ₂ |
|---------------------|----------------------|---------------------|----------------------|----------------|----------------|
| 1121-0505 | 30-0003 | --- | --- | .030" (0.8) | .075" (2.9) |
| 1121-0494 | 30-0004 | --- | --- | .040" (1.0) | .085" (2.2) |
| 1121-0506 | 30-0006 | --- | --- | .060" (1.5) | .105" (2.7) |
| 1121-0367 | 30-0300 | 1121-0462* | 30-030* | .030" (0.8) | .065" (1.7) |
| 1121-0342 | 30-0400 | 1121-0463* | 30-040* | .040" (1.0) | .085" (2.2) |
| --- | --- | --- | 30-050* | .050" (1.3) | .095" (2.4) |
| 1121-0368 | 30-0600 | 1121-0464* | 30-060* | .060" (1.5) | .115" (2.9) |
| 1121-0507 | 30-0900 | --- | --- | .090" (2.3) | .190" (4.8) |
| 1121-0369 | 30-0060 | 1121-0465* | 30-6000* (Not shown) | .060" (1.5) | .188" (4.8) |

PLATO® ECONOMY GRADE TIP

Tip drawings are actual size.



PLATO® PREMIUM GRADE TIP

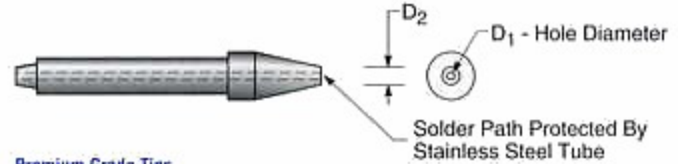

Premium Grade Tips


Iron plated outside and stainless steel tube insert prevents solder path erosion by solder.

Economy Grade Tips

Economy grade tips do not have a stainless steel tube insert. They are made of oxygen-free high-conductivity copper, nickel-plated inside and outside to minimize corrosion by solder.

Tip samples are available. Custom tip designs on request. All dimensions are shown before tinning and are subject to manufacturing tolerances. () = mm

* Indicates tips with a stainless steel tube insert.

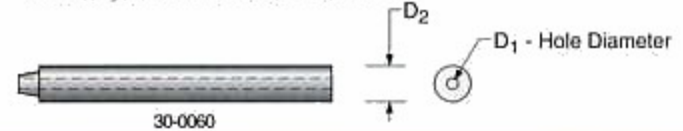

Plato® Tips to fit Pace® Air-Vac®, and A.P.E.® Desoldering Irons

| Pace® | PLATO® | L | D ₁ | D ₂ |
|---|---------|--------------|----------------|----------------|
| <i>Plato® Tips to fit Pace® SX-20, SX-25, SX-25V SODR-X-TRACTORS®</i> | | | | |
| 1121-0213 | 20-0109 | 1.00" (25.4) | .025" (0.6) | .060" (1.5) |
| 1121-0480 | 20-0114 | 1.00" (25.4) | .030" (0.8) | .060" (1.5) |
| --- | 20-0815 | 1.00" (25.4) | .036" (0.9) | .065" (1.7) |
| 1121-0479 | 20-0110 | 1.00" (25.4) | .040" (1.0) | .080" (2.0) |
| 1121-0216 | 20-0113 | 1.00" (25.4) | .050" (1.3) | .090" (2.3) |
| 1121-0217 | 20-0111 | 1.00" (25.4) | .060" (1.5) | .100" (2.5) |
| 1121-0091 | 20-0112 | 1.00" (25.4) | .090" (2.3) | .125" (3.2) |
| <i>Plato® Tips to fit Pace® SX-40A, SX-55A, SX-65A, SX-70 SODR-X-TRACTORS® with Plato Adapter 33-0001</i> | | | | |
| 1121-0485 | 20-025 | 1.75" (44.5) | .030" (0.8) | .080" (2.0) |
| 1121-0486 | 20-040 | 1.75" (44.5) | .040" (1.0) | .080" (2.0) |
| --- | 20-050 | 1.75" (44.5) | .050" (1.3) | .090" (2.3) |
| 1121-0255 | 20-060 | 1.75" (44.5) | .060" (1.5) | .100" (2.5) |

PLATO® TIP



Premium Quality for Long Life

Made of oxygen-free high-conductivity copper, protected inside and outside to minimize erosion by solder.


Tip samples are available. Custom tip designs on request. () = mm

Packaged 10 pieces per pack.

Plato® Tips to fit V-581/682/985/185SF Desoldering Irons

| PLATO® | L | D ₁ | D ₂ |
|---------|--------------|----------------|----------------|
| VT-0025 | .500" (12.7) | .025" (0.6) | .070" (1.8) |
| VT-0033 | .500" (12.7) | .033" (0.8) | .070" (1.8) |
| VT-0040 | .500" (12.7) | .040" (1.0) | .090" (2.3) |
| VT-0050 | .500" (12.7) | .050" (1.3) | .100" (2.5) |
| VT-0060 | .500" (12.7) | .060" (1.5) | .120" (3.0) |
| VT-0090 | .500" (12.7) | .090" (2.3) | .170" (4.3) |

PLATO® PREMIUM QUALITY TIP

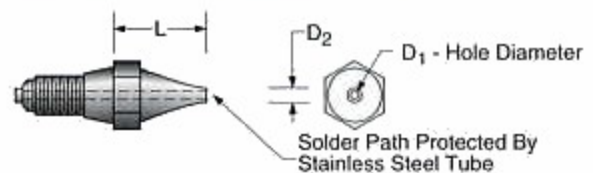

Premium Quality for Long Life

Stainless steel tube prevents solder path from erosion by solder. Heavy iron plating at working surfaces. Tinned for good heat transfer. Threads and body immunized. () = mm

