
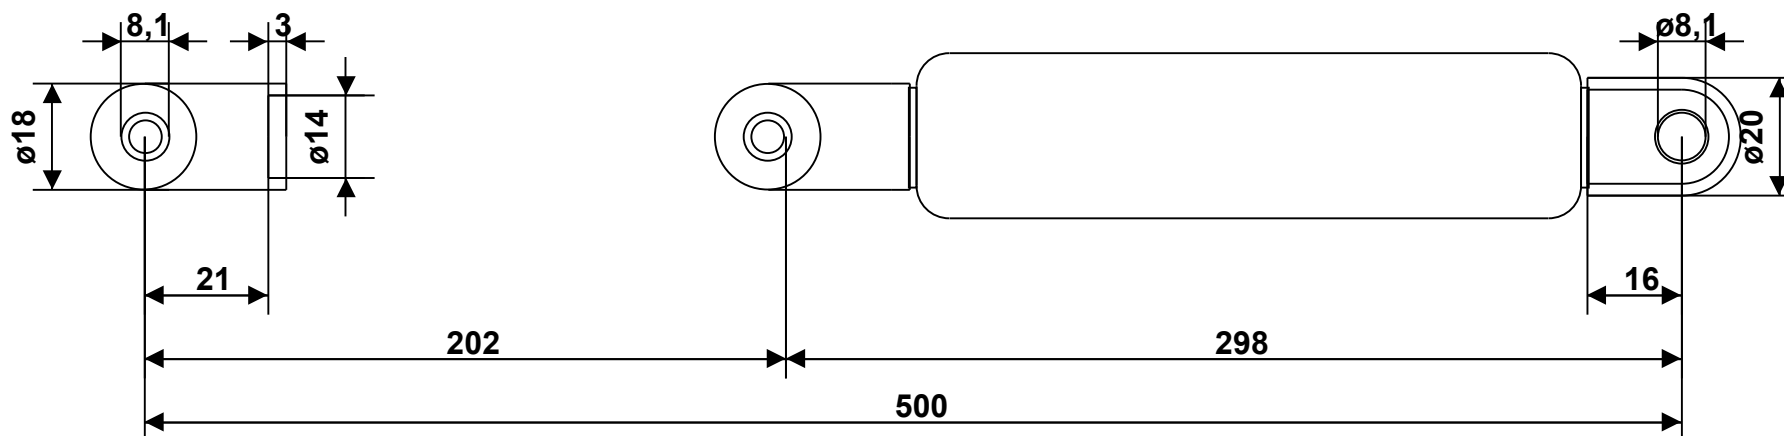


G 14 28 0200 1 0500 AK21 AB16 01700N



Intended for internal use and customer / Tolerance of ext. length: +/- 2mm - Dimensions without tolerance: per DIN ISO 2768-1 -c (ISO 2768 -c) - For Information Only
Force tolerance: F1 >= 1000N: +/- 5%; < 1000N: +/- 10%, min.: +/- 10N, max.: +/- 50N - Unregistered Copy, Print-out or file not subject to modification service.
End fitting orientation is random and not represented by drawing unless specified - Observe disposal instructions - Not true to scale

		Please note our technical instructions			Assembly/storing with piston rod down	
		No opening-no heating-high pressure				
23. June 2020	Auto-Printservice					
Made in Germany		Part	Dimension	Material / Surface	Fitting	Progr.:54,00 %
Drawing owned by Hahn Gasfedern GmbH		Piston rod	Ø14mm	steel, chrome plated	AK21 M10 Ø8.1 t=18 * ANS/M10/AUG/004	
info@hahn-gasfedern.de		Cylinder	Ø28mm	Stahl,black	AB16 Ø8,1 t=10 * BG/28/AUG/001	
www.hahn-gasfedern.de					Configuration ID : 10063825-	